

**Raccord droit rapide, synthétique  
filetage extérieur  
décharge de traction  
haute étanchéité**

- résistant à l'huile et l'essence
- largement résistant aux acides et solvants
- sans silicone, cadmium et halogène
- serrage et étanchéité optimaux des câbles

Pour assurer un indice de protection élevé entre le presse-étoupe et le corps du raccord, il est nécessaire d'utiliser une masse d'étanchéité (voir norme 1015 de la société FLEXA).


**Plastic connector, quick-type  
straight, outer thread  
strain relief  
high sealing rate**

- resistant against oil and benzene
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- optimal held and sealing of cables at the same time

To ensure a high protection system, IP 68, at the thread between cable gland insert and screw connector housing it is necessary to use a sealing compound (FLEXA company standard 1015 A).

| N° FLEXA      | N° FLEXA      | DE OD     |             | Ø             | Ø I  | Ø B  | C    | D     | SW1 | SW2 | kg/100 | Pce               |                      |
|---------------|---------------|-----------|-------------|---------------|------|------|------|-------|-----|-----|--------|-------------------|----------------------|
| noir<br>black | gris<br>grey  | mm        | mm          | mm            | mm   | mm   | mm   | mm    | mm  | mm  |        | Pcs.              |                      |
| <b>RQGZ-M</b> |               |           |             |               |      |      |      |       |     |     |        | <b>métr.</b>      | <b>[IP 68 / 69K]</b> |
|               |               |           |             |               |      |      |      |       |     |     |        | EN 60423          |                      |
| 5020.031.212  | 5020.031.012  | 4 - 6,5   | <b>10,0</b> | <b>M 12</b>   | 6,5  | 17,0 | 8,0  | 51,0  | 16  | 15  | 0,800  | 20                |                      |
| 5020.031.216  | 5020.031.016  | 5 - 9,5   | <b>13,0</b> | <b>M 16</b>   | 9,5  | 20,0 | 8,0  | 53,0  | 18  | 20  | 1,300  | 20                |                      |
| 5020.031.217  | 5020.031.017* | 5 - 9,5   | <b>15,8</b> | <b>M 16</b>   | 10,5 | 23,0 | 8,0  | 60,0  | 21  | 20  | 1,500  | 20                |                      |
| 5020.031.220  | 5020.031.020  | 8 - 11,0  | <b>15,8</b> | <b>M 20</b>   | 13,0 | 23,0 | 8,0  | 59,0  | 21  | 24  | 1,500  | 20                |                      |
| 5020.031.223  | 5020.031.023* | 8 - 11,0  | <b>18,5</b> | <b>M 20</b>   | 12,0 | 27,0 | 8,0  | 59,0  | 24  | 24  | 1,700  | 20                |                      |
| 5020.031.225  | 5020.031.025  | 11 - 16,0 | <b>21,2</b> | <b>M 25</b>   | 16,0 | 33,5 | 8,0  | 70,0  | 27  | 29  | 3,000  | 10                |                      |
| 5020.031.232  | 5020.031.032  | 15 - 21,0 | <b>28,5</b> | <b>M 32</b>   | 18,0 | 37,0 | 10,0 | 82,0  | 34  | 36  | 3,800  | 10                |                      |
| 5020.031.240  | 5020.031.040  | 16 - 26,0 | <b>34,5</b> | <b>M 40</b>   | 25,0 | 44,0 | 10,0 | 85,0  | 40  | 46  | 5,700  | 10                |                      |
| 5020.031.250  | 5020.031.050  | 27 - 35,0 | <b>42,5</b> | <b>M 50</b>   | 32,0 | 58,0 | 12,0 | 141,0 | 55  | 55  | 11,200 | 10                |                      |
| 5020.031.263  | 5020.031.063  | 32 - 42,0 | <b>54,5</b> | <b>M 63</b>   | 44,0 | 68,0 | 12,0 | 145,0 | 65  | 68  | 13,200 | 10                |                      |
| <b>RQGZ-P</b> |               |           |             |               |      |      |      |       |     |     |        | <b>PG</b>         | <b>[IP 68 / 69K]</b> |
|               |               |           |             |               |      |      |      |       |     |     |        | DIN 40430         |                      |
| 5020.034.207  | 5020.034.007  | 3 - 6,5   | <b>10,0</b> | <b>7</b>      | 7,0  | 17,0 | 8,0  | 51,0  | 16  | 15  | 0,800  | 20                |                      |
| 5020.034.209  | 5020.034.009  | 4 - 8,0   | <b>13,0</b> | <b>9</b>      | 8,0  | 20,0 | 8,0  | 53,0  | 18  | 19  | 1,050  | 20                |                      |
| 5020.034.211  | 5020.034.011  | 5 - 10,0  | <b>15,8</b> | <b>11</b>     | 10,0 | 23,0 | 8,0  | 59,0  | 21  | 22  | 1,450  | 20                |                      |
| 5020.034.213  | 5020.034.013  | 6 - 11,0  | <b>15,8</b> | <b>13,5</b>   | 11,0 | 27,0 | 8,0  | 59,0  | 21  | 24  | 1,600  | 20                |                      |
| 5020.034.214  | 5020.034.014  | 6 - 12,0  | <b>18,5</b> | <b>13,5</b>   | 12,0 | 27,0 | 8,0  | 59,0  | 24  | 24  | 1,600  | 20                |                      |
| 5020.034.215  | 5020.034.015  | 6 - 12,0  | <b>21,2</b> | <b>13,5</b>   | 12,0 | 29,5 | 8,0  | 70,0  | 27  | 24  | 2,200  | 10                |                      |
| 5020.034.216  | 5020.034.016  | 10 - 14,0 | <b>21,2</b> | <b>16</b>     | 14,0 | 29,5 | 10,0 | 72,0  | 27  | 27  | 2,300  | 10                |                      |
| 5020.034.221  | 5020.034.021  | 13 - 18,0 | <b>28,5</b> | <b>21</b>     | 20,0 | 37,0 | 11,0 | 82,0  | 34  | 33  | 3,500  | 10                |                      |
| 5020.034.229  | 5020.034.029  | 18 - 25,0 | <b>34,5</b> | <b>29</b>     | 25,0 | 44,0 | 11,0 | 85,0  | 40  | 42  | 5,000  | 10                |                      |
| 5020.034.236  | 5020.034.036  | 22 - 32,0 | <b>42,5</b> | <b>36</b>     | 32,0 | 58,0 | 13,0 | 140,0 | 55  | 53  | 8,500  | 10                |                      |
| 5020.034.248  | 5020.034.048  | 34 - 44,0 | <b>54,5</b> | <b>48</b>     | 44,0 | 68,0 | 14,0 | 144,0 | 65  | 65  | 11,200 | 10                |                      |
| <b>RQGZ-N</b> |               |           |             |               |      |      |      |       |     |     |        | <b>NPT</b>        | <b>[IP 68 / 69K]</b> |
|               |               |           |             |               |      |      |      |       |     |     |        | ANSI/ASME B1.20.1 |                      |
| 5704.015.205  |               | 6 - 12,0  | <b>15,8</b> | <b>1/2"</b>   |      |      |      |       |     |     | 0,700  | 20                |                      |
| 5704.021.205  |               | 7 - 10,0  | <b>21,2</b> | <b>1/2"</b>   |      |      |      |       |     |     | 1,000  | 10                |                      |
| 5704.028.214  |               | 12 - 18,0 | <b>28,5</b> | <b>3/4"</b>   |      |      |      |       |     |     | 1,400  | 10                |                      |
| 5704.034.210  |               | 21 - 25,0 | <b>34,5</b> | <b>1"</b>     |      |      |      |       |     |     | 2,200  | 10                |                      |
| 5704.042.217  |               | 24 - 32,0 | <b>42,5</b> | <b>1 1/4"</b> |      |      |      |       |     |     | 4,500  | 10                |                      |

\* Délai de livraison sur demande  
\* Delivery time on request

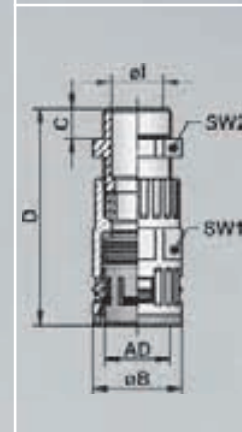

Portrait  
Gaines annelées  
ROHRflex  
Raccords  
FLEXAquick