

# PRESSE-ETOUPE

en Laiton

Garniture: CAOUTCHOUC NR 55 sh A

## Filetage METRIQUE pas de 1,5 CEI EN 60423 CEI EN 50262

Référence Laiton Nickelé	P	Trou de fixation (mm)	Ø A min-max (mm)	B1 Clef bouchon (mm)	B2 Clef corps (mm)	C (mm)	L min-max (mm)	Cond.* Boîte/Sachet
2003M1221N	M12x1,5	12,2	4 - 6	13	14	5	13-16	500/100
2003M1621N	M16x1,5	16,2	8 -10	15	17	5	14-17	200/100
2003M2021N	M20x1,5	20,5	10 -12	20	22	6	16-19	150/50
2003M2521N	M25x1,5	25,4	17 -19	28	30	7	19-23	50/50
2003M3221N	M32x1,5	32,5	26 -28	37	39	8	21-25	100/50
2003M4021N	M40x1,5	40,5	33 -35	47	50	8	24-30	20/20
2003M5021N	M50x1,5	50,5	39 -41	54	57	9	28-34	10/5
2003M6321N	M63x1,5	64,0	43 -45	60	66/68	10	30-36	10/5

2003  
2002  
2001




Matière: LAITON  
Étanchéité: IP 54

Garniture: CAOUTCHOUC NR 55 sh A

## Filetage Pg DIN 40 430 - Dimensions DIN 46 320

Référence Laiton Nickelé	P	Trou de fixation (mm)	Ø A min-max (mm)	B1 Clef bouchon (mm)	B2 Clef corps (mm)	C (mm)	L min-max (mm)	Cond.* Boîte/Sachet
200200721N	Pg 7	12,7	5 - 7	13	14	5	13-16	400/100
200200921N	Pg 9	15,5	8 -10	15	17	6	14-17	300/100
200201121N	Pg11	18,8	8 -10	18	20	6	14-18	200/50
200201321N	Pg13,5	20,5	10 -12	20	22	6,5	16-19	100/50
200201621N	Pg16	22,6	12 -14	22	24	6,5	17-20	50/50
200202121N	Pg21	28,5	17 -19	28	30	7	19-23	50/50
200202921N	Pg29	37,2	26 -28	37	40	8	21-25	15/15
200203621N*	Pg36	47,2	33 -35	47	50	9	24-30	10/10
200204221N	Pg42	54,2	39 -41	54	57	10	28-34	10/10
200204821N*	Pg48	60,0	43 -45	60	64	10	36-45	10/10

\* Garniture concentrique

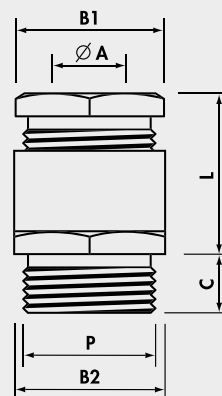

Garniture: PVC 50 sh A

## Filetage GAZ ISO 228/1

Référence Laiton Nickelé	P	Trou de fixation (mm)	Ø A min-max (mm)	B1 Clef bouchon (mm)	B2 Clef corps (mm)	C (mm)	L min-max (mm)	Cond.* Boîte/Sachet
200101441	G1/4"	13,5	5,5 - 7	13	15	6,5	14-17	400/100
207101441	G1/4"	13,5	5,5 - 7	13	Ø 15	6,5	14-17	400/100
200103841	G3/8"	17,0	6,5 - 8,5	17	19	7,5	15-19	200/100
200101241	G1/2"	21,5	8 -11	21	23	8	17-23	100/100
200105841	G5/8"	23,5	11 -14	23	25	8,5	20-24	100/50
200103441	G3/4"	27,0	14,5-17,5	27	29	9	20-26	50/50
200110041	G1"	34,0	18 -22	34	36	10	23-28	25/25
200111841	G1"1/8	38,0	21 -26	38	40	10,5	23-28	25/25
200111441	G1"1/4	42,0	28 -32	42	45	11,5	25-31	20/20
200111241	G1"1/2	48,0	32 -36	48	50	11,5	28-35	10/10
200120041	G2"	60,0	38 -42	60	64	13,5	31-37	10/10
• 200121221*	G2"1/2	76,0	44 -57	80	80	20	32-37	5/5
• 200130021	G3"	89,0	67 -69	95	95	20	42-52	5/5

Disponible NICKELÉ: ajouter N après de la référence

• Garniture en CLOROPRENE

\* Bague d'étanchéité concentrique

