## **Datasheet**

## cod. P996 LED LED lamp for work-benches





6W LED lamp made up of aluminum and ABS illuminator, stainless-steel gooseneck arm covered by a PVC sheath, ABS base with fastening holes, on/ off switch and built-in LED driver.

LED source exempt from photobiological risk.

Power supply 230V 50-60Hz.

(€ ☐ IP30 ∰

Applications: particularly suitable for the lightning of work benches, sewing machines, stitching machines, grinding machines.

## **Electrical features**

Power supply LED operating voltage LED operating current

Power IEC class LED driver 230 Vac 50-60Hz 9,3 Vdc 700 mA dc 6 W II built-in

## **Mechanical and optical features**

LED type N. LED LED lifetime Brightness Color Rendering Index Light color Fastening Switch

Degre of protection Color


CITILED CL-L251 1 x 6W 50 000 h 625 lm - 120° 67 5000 K 4 screws Unipolar on-off on the base **IP30** 

Black - RAL9002

Order codes

CODES		COLOR
P99650.B	500mm	RAL9002
P996.70.B	700mm	RAL9002
P996.50.N	500mm	Black
P996.70.N	700mm	Black

Flow light from working surface

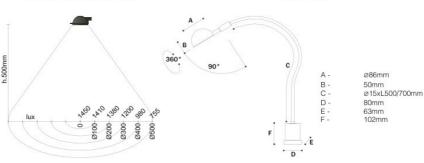

Dimensions